

Project Title:

ACO contact:

Līga Rinda

67807479 / 67828430

liga.rinda@aco-nordic.lv

Total Bill of Quantity


Infiltration

Außenfläche 1 - Parkplatz West

Füllkörperrigolbemessung

Total Gross Volume 26,35 m³

Total Net Volume 25,03 m³

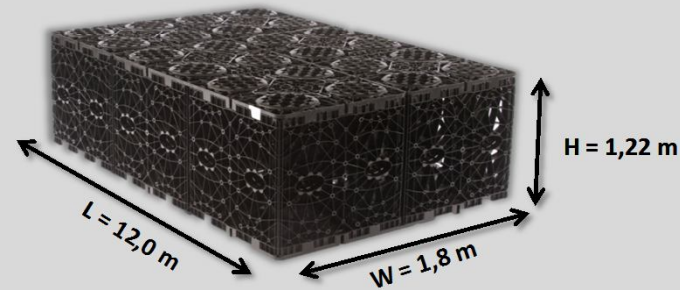

L =	12,00 m
W =	1,80 m
H =	1,22 m

Half part 120 pcs.



Part number 314020

Side panel 92 pcs.



Part number 314021

Top cover (4 pcs.) 60 pcs.



Part number 314022

Brickbonding - 2 pcs./m³



Connector 53 pcs.
50 pcs./pkg. 1



Part number 314023

Layer connector 53 pcs.
50 pcs./pkg. 1

Part number 314023



Half Blocks to cut = pcs.

Waste (Block = 2 half parts) pcs.



Part number

Accessories

Filtervlies (15% Überl.)
number of rolls (4x12,5m)



Part number

Flexible Top Hats

φ 110 flexible top hat	<input type="text"/>	pcs. =	DNOD	110 mm	Part number	<input type="text" value="27045"/>
φ 160 flexible top hat	<input type="text"/>	pcs. =	DNOD	160 mm	Part number	<input type="text" value="27046"/>
φ 225 flexible top hat	<input type="text"/>	pcs. =	DNOD	225 mm	Part number	<input type="text" value="27047"/>
φ 300 flexible top hat	<input type="text"/>	pcs. =	DNOD	300 mm	Part number	<input type="text" value="27048"/>