


STEPPED PARK POLES

Type	H (m)	U* (mm)	K (mm)	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	M (kg)
STP35-108-2	3	500	1000	108	60	2000	1500	22
ST35-114-2	3	500	500	114	60	1500	2000	29
STP45-108-2	4	500	1000	108	60	2000	2500	26
STP45-114-2	4	500	500	114	60	1500	3000	33
STP55-108-2	5	500	1000	108	60	2000	3500	30
ST55-114-2	5	500	500	114	60	2000	3500	38
STP65-108-2	6	500	1000	108	60	3000	3500	38
STP65-114-2	6	500	500	114	60	2000	4500	44

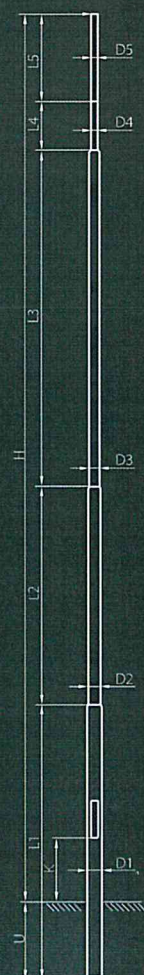

STRAIGHT STEPPED POLES

Type	H (m)	U* (mm)	K (mm)	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	D5 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	M (kg)
STP65-108-3	6	500	1000	108	76	60			3000	2000	1500			46
STP75-108-3	7	500	1000	108	76	60			3000	3000	1500			52
STP85-114-4	8	500	1000	114	89	76	60		3000	2000	2000	1500		73
STP105-139-4	10	500	1000	139	114	76	60		4000	3000	2000	1500		57
STP126-168-4	12	650	1000	168	127	89	60		5150	3000	3000	1500		154
STP156-219-4	15	650	1000	219	168	114	89	60	6000	4000	2000	2000	1650	254

U* - installation types - 1) In foundation 2) On flange plate 3) Embedded (U= 1,0-2,0m)